



Our Success Story

In 1980, we began our journey manufacturing preliminary white appliances, including finished and semi-finished iron, steel and sheet metal for the automotive, machinery, trailer, defense, food and construction industries.

Over the years, we have received much recognition and multiplied our production capacity.

With the vision of continuous development and growth, we established Green Cooler brand in 2016 for the production of commercial coolers.

Our main goal with the Green Cooler brand is to produce vertical/horizontal display coolers and freezers for the leading brands in the industry.

Our R&D team of specialized designers and engineers carries out projects that create brand value for companies with customized products.

Our Quality Policy

Our goal as Öztaş is to manufacture high quality cooler products in compliance with national and international standards and legal requirements, as well as industrial machinery, and to become the preferred supplier of the white goods and automotive sectors in the manufacture of light and heavy sheet metal, maintain customer satisfaction through our prompt and solution-oriented after-sales service, introduce our products to domestic and foreign markets, and promote our brand recognition.

Our quality policy to achieve this goal is;

- Continuous development through training of all personnel.
- Ensuring the profitability of our company by increasing quality and efficiency.
- To follow the technological innovations in our sector simultaneously with the whole world and present them to all our customers.
- To ensure the highest customer satisfaction.
- In cooperation with all our staff, to constantly satisfy all our customers by our quality in every product we produce and also by our timely delivery in the requested quantities and to ensure the review, maintenance and continuous improvement of the efficiency of the quality management system by complying with the legal customer conditions.



Our energy efficiency tests are performed in our R&D laboratories approved by Intertek in accordance with EN ISO 10902 standard.

We have two laboratories approved by Intertek to perform CB and Energy Efficiency tests.

CE | CB

We strive diligently to consume less energy and to reduce our carbon footprint in the production process as well.

Our R&D team further focuses on creating potential solutions for environmental problems, while increasing the product quality.



Employees in 24 Countries 100,000 Units of Coolers

Green Cooler draws a significant attention not only in Türkiye but also in foreign markets. It is naturally possible to encounter our products all around the world day by day, since our factory is able to produce exclusive designs for the need of every brand.




Global Footprints


Green Cooler's fridges consume more renewable energy even in the production phases compared to other production plants. Our factory's roof is equipped with solar panels in accordance with our sustainable energy policies. We are able to minimize our carbon footprints by means of these panels, thereby positioning our production line in an environmentally-friendly perspective.



CUSTOM

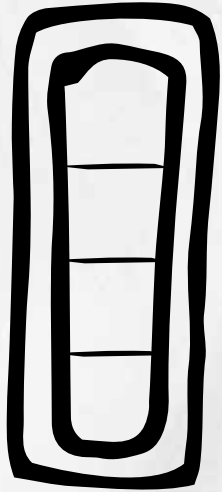

MADE

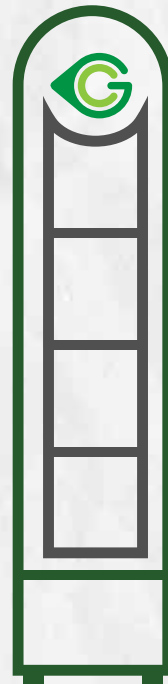





12



Vertical Coolers/Freezers

Coolers

- 12** Single Door Coolers
- 50** Double Door Coolers
- 62** Triple Door Coolers

Freezers

- 70** Single Door Freezers

Freezer/Cooler

- 76** Combi

78



Counter Front-Under-Mini Coolers

Mini Coolers

- 79** Mini Coolers
- 82** Under Bar Coolers
- 92** Can Cooler
- 100** Counter Front Coolers

106



Wine Coolers

118



Modular Coolers

- 120** 360 Modular Coolers
- 122** Pallet Modular Coolers
- 125** Family Modular Coolers

Single Door Vertical Coolers





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 195 |
| Net Volume (L) | 170 |
| Internal Dimensions (w*d*h) (mm) | 357*365*1410 |
| External Dimensions (w*d*h) (mm) | 435*516*2008.5 |
| External Dimensions with Package (w*d*h) (mm) | 475*550*2143.5 |
| Usable Rack Area (m ²) | 0,106 |
| Net Weight (kg) | 70 |
| Gross Weight (kg) | 78 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,22 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 195 |
| Bottle 500 mL Loading Unit | 120 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications **2008,5 mm**

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 195 |
| Net Volume (L) | 170 |
| Internal Dimensions (w*d*h) (mm) | 357*365*1410 |
| External Dimensions (w*d*h) (mm) | 435*512*1805 |
| External Dimensions with Package (w*d*h) (mm) | 470*545*1944 |
| Usable Rack Area (m ²) | 0,106 |
| Net Weight (kg) | 73 |
| Gross Weight (kg) | 79 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,22 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 195 |
| Bottle 500 mL Loading Unit | 120 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



180 EC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 173 |
| Net Volume (L) | 167 |
| Internal Dimensions (w*d*h) (mm) | 357.5*363.5*1417 |
| External Dimensions (w*d*h) (mm) | 435*517*2010 |
| External Dimensions with Package (w*d*h) (mm) | 475*558*2143 |
| Usable Rack Area (m ²) | 0,1 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,26 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 170 |
| Bottle 500 mL Loading Unit | 100 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Plastic Inner Body

2010 mm



180 EWOC



SPECIFICATIONS

| | |
|---|---------------------------|
| Gross Volume (L) | 173 |
| Net Volume (L) | 167 |
| Internal Dimensions (w*d*h) (mm) | 357,5*363,5*1417 |
| External Dimensions (w*d*h) (mm) | 435*517*1832 |
| External Dimensions with Package (w*d*h) (mm) | 470*535*1967 |
| Usable Rack Area (m ²) | 0,103 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | First line 5, rear line 4 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,26 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 170 |
| Bottle 500 mL Loading Unit | 115 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Plastic Inner Body



270 C



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 238 |
| Net Volume (L) | 226 |
| Internal Dimensions (w*d*h) (mm) | 355*465*1442 |
| External Dimensions (w*d*h) (mm) | 455*623*2031 |
| External Dimensions with Package (w*d*h) (mm) | 490*700*2163 |
| Usable Rack Area (m ²) | 0,138 |
| Net Weight (kg) | 93 |
| Gross Weight (kg) | 101 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,28 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 300 |
| Bottle 500 mL Loading Unit | 203 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 36 |
| 40" Container Loading Unit | 72 |
| 40" High Container Loading Unit | 72 |
| 13.6 m Truck Loading Unit | 95 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2031 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 238 |
| Net Volume (L) | 226 |
| Internal Dimensions (w*d*h) (mm) | 355*465*1442 |
| External Dimensions (w*d*h) (mm) | 455*623*1853,5 |
| External Dimensions with Package (w*d*h) (mm) | 490*700*1985 |
| Usable Rack Area (m ²) | 0,138 |
| Net Weight (kg) | 90 |
| Gross Weight (kg) | 98 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,28 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 300 |
| Bottle 500 mL Loading Unit | 203 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 36 |
| 40" Container Loading Unit | 72 |
| 40" High Container Loading Unit | 72 |
| 13.6 m Truck Loading Unit | 95 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

1853,5 mm



0 mm

290 C



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 297 |
| Net Volume (L) | 283 |
| Internal Dimensions (w*d*h) (mm) | 424*496*1408 |
| External Dimensions (w*d*h) (mm) | 500*640*2023,5 |
| External Dimensions with Package (w*d*h) (mm) | 535*670*2150 |
| Usable Rack Area (m ²) | 0.174 |
| Net Weight (kg) | 99 |
| Gross Weight (kg) | 104 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,32 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 360 |
| Bottle 500 mL Loading Unit | 204 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 33 |
| 40" Container Loading Unit | 71 |
| 40" High Container Loading Unit | 71 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2023,5 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 297 |
| Net Volume (L) | 276 |
| Internal Dimensions (w*d*h) (mm) | 424*496*1408 |
| External Dimensions (w*d*h) (mm) | 500*640*1820 |
| External Dimensions with Package (w*d*h) (mm) | 535*670*1957 |
| Usable Rack Area (m ²) | 0.174 |
| Net Weight (kg) | 93 |
| Gross Weight (kg) | 99 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,32 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 360 |
| Bottle 500 mL Loading Unit | 204 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 33 |
| 40" Container Loading Unit | 71 |
| 40" High Container Loading Unit | 71 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 316 |
| Net Volume (L) | 303 |
| Internal Dimensions (w*d*h) (mm) | 424*496*1499 |
| External Dimensions (w*d*h) (mm) | 500*640*2147 |
| External Dimensions with Package (w*d*h) (mm) | 535*670*2250 |
| Usable Rack Area (m ²) | 0,174 |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,32 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 360 |
| Bottle 500 mL Loading Unit | 204 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 33 |
| 40" Container Loading Unit | 71 |
| 40" High Container Loading Unit | 71 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 316 |
| Net Volume (L) | 303 |
| Internal Dimensions (w*d*h) (mm) | 424*496*1499 |
| External Dimensions (w*d*h) (mm) | 500*640*1920 |
| External Dimensions with Package (w*d*h) (mm) | 515*700*2150 |
| Usable Rack Area (m ²) | 0,17 |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,32 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 360 |
| Bottle 500 mL Loading Unit | 204 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 33 |
| 40" Container Loading Unit | 71 |
| 40" High Container Loading Unit | 71 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

1920 mm



375 EC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 358 |
| Net Volume (L) | 345 |
| Internal Dimensions (w*d*h) (mm) | 516*470*1555 |
| External Dimensions (w*d*h) (mm) | 590*629*2005 |
| External Dimensions with Package (w*d*h) (mm) | 605*655*2142 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 72 |
| Gross Weight (kg) | 80 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 6 |
| Product Display Area (m ²) | 0,372 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 410 |
| Bottle 500 mL Loading Unit | 246 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 27 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 76 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Plastic Inner Body

2005 mm



375 EWOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 358 |
| Net Volume (L) | 345 |
| Internal Dimensions (w*d*h) (mm) | 516*470*1555 |
| External Dimensions (w*d*h) (mm) | 590*629*1817 |
| External Dimensions with Package (w*d*h) (mm) | 605*655*1953 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 67,8 |
| Gross Weight (kg) | 75,8 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 6 |
| Product Display Area (m ²) | 0,372 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 410 |
| Bottle 500 mL Loading Unit | 246 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 27 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 76 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Plastic Inner Body

1817 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 240 |
| Net Volume (L) | 225 |
| Internal Dimensions (w*d*h) (mm) | 490*465.5*1091 |
| External Dimensions (w*d*h) (mm) | 592.5*624*1540.5 |
| External Dimensions with Package (w*d*h) (mm) | 632.5*660*1670 |
| Usable Rack Area (m ²) | 0,193 |
| Net Weight (kg) | 81 |
| Gross Weight (kg) | 87 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,36 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 343 |
| Bottle 500 mL Loading Unit | 189 |
| Number of Shelves | 4 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*


- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 240 |
| Net Volume (L) | 225 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1091 |
| External Dimensions (w*d*h) (mm) | 592.5*624*1365 |
| External Dimensions with Package (w*d*h) (mm) | 632.5*660*1505 |
| Usable Rack Area (m ²) | 0,193 |
| Net Weight (kg) | 78 |
| Gross Weight (kg) | 83 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,36 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 343 |
| Bottle 500 mL Loading Unit | 189 |
| Number of Shelves | 4 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



380 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 352 |
| Net Volume (L) | 343 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1555 |
| External Dimensions (w*d*h) (mm) | 590*620*1840 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*1972 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 96 |
| Gross Weight (kg) | 101.5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,36 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 423 |
| Bottle 500 mL Loading Unit | 256 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

1840 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 352 |
| Net Volume (L) | 343 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1555 |
| External Dimensions (w*d*h) (mm) | 590*622*2005 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*2138.5 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 100 |
| Gross Weight (kg) | 106 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,36 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 446 |
| Bottle 500 mL Loading Unit | 256 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2005 mm



410 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 385 |
| Net Volume (L) | 363 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1737 |
| External Dimensions (w*d*h) (mm) | 590*620*2015 |
| External Dimensions with Package (w*d*h) (mm) | 655*650*2145 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 105 |
| Gross Weight (kg) | 115 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,36 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 420 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2015 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 385 |
| Net Volume (L) | 352 |
| Internal Dimensions (w*d*h) (mm) | 490*465,5*1737 |
| External Dimensions (w*d*h) (mm) | 590*580*2010 |
| External Dimensions with Package (w*d*h) (mm) | 630*685*2150 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,34 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2010 mm



390 C



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 348 |
| Net Volume (L) | 328 |
| Internal Dimensions (w*d*h) (mm) | 490*485*1458 |
| External Dimensions (w*d*h) (mm) | 590*645*2005 |
| External Dimensions with Package (w*d*h) (mm) | 610*681.5*2140 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 102 |
| Gross Weight (kg) | 108.5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 75 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2005 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 348 |
| Net Volume (L) | 328 |
| Internal Dimensions (w*d*h) (mm) | 490*487.5*1458.5 |
| External Dimensions (w*d*h) (mm) | 590*648*1840 |
| External Dimensions with Package (w*d*h) (mm) | 610*681.5*1980 |
| Usable Rack Area (m ²) | 0.192 |
| Net Weight (kg) | 100 |
| Gross Weight (kg) | 110 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 75 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

1840 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 357 |
| Net Volume (L) | 336 |
| Internal Dimensions (w*d*h) (mm) | 489*490*1499 |
| External Dimensions (w*d*h) (mm) | 590*645*2147 |
| External Dimensions with Package (w*d*h) (mm) | 630*655*2270 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 75 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2147 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 415 |
| Net Volume (L) | 394 |
| Internal Dimensions (w*d*h) (mm) | 489*485*1700 |
| External Dimensions (w*d*h) (mm) | 590*645*2147 |
| External Dimensions with Package (w*d*h) (mm) | 630*655*2270 |
| Usable Rack Area (m ²) | 0,197 |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 75 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2147 mm



400 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 397 |
| Net Volume (L) | 389 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1862 |
| External Dimensions (w*d*h) (mm) | 590*620*2025 |
| External Dimensions with Package (w*d*h) (mm) | 655*640*2135 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 125 |
| Gross Weight (kg) | 135 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 498 |
| Bottle 500 mL Loading Unit | 245 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 75 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2025 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 627 |
| Net Volume (L) | 575 |
| Internal Dimensions (w*d*h) (mm) | 624*643*1371 |
| External Dimensions (w*d*h) (mm) | 725*760*2060 |
| External Dimensions with Package (w*d*h) (mm) | 751*776*2200 |
| Usable Rack Area (m ²) | 0,327 |
| Net Weight (kg) | 134 |
| Gross Weight (kg) | 144 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 9 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 10 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 10 |
| Product Display Area (m ²) | 0,551 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 810 |
| Bottle 500 mL Loading Unit | 405 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 21 |
| 40" Container Loading Unit | 48 |
| 40" High Container Loading Unit | 48 |
| 13.6 m Truck Loading Unit | 54 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2060 mm



670 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 637 |
| Net Volume (L) | 584 |
| Internal Dimensions (w*d*h) (mm) | 624*643*1607 |
| External Dimensions (w*d*h) (mm) | 725*760*2060 |
| External Dimensions with Package (w*d*h) (mm) | 751*776*2200 |
| Usable Rack Area (m ²) | 0,327 |
| Net Weight (kg) | 136 |
| Gross Weight (kg) | 146 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 9 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 10 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 10 |
| Product Display Area (m ²) | 0,551 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 810 |
| Bottle 500 mL Loading Unit | 405 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 21 |
| 40" Container Loading Unit | 48 |
| 40" High Container Loading Unit | 48 |
| 13.6 m Truck Loading Unit | 54 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2060 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 640 |
| Net Volume (L) | 565 |
| Internal Dimensions (w*d*h) (mm) | 690*553*1702 |
| External Dimensions (w*d*h) (mm) | 790.5*676*2140 |
| External Dimensions with Package (w*d*h) (mm) | 796*700*2280 |
| Usable Rack Area (m ²) | 0,323 |
| Net Weight (kg) | 150 |
| Gross Weight (kg) | 170 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 10 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 11 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0,531 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 800 |
| Bottle 500 mL Loading Unit | 400 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 23 |
| 40" Container Loading Unit | 49 |
| 40" High Container Loading Unit | 49 |
| 13.6 m Truck Loading Unit | 57 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2140 mm



660 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 649 |
| Net Volume (L) | 568 |
| Internal Dimensions (w*d*h) (mm) | 690*553*1702 |
| External Dimensions (w*d*h) (mm) | 790.5*665*2215 |
| External Dimensions with Package (w*d*h) (mm) | 830*690*2335 |
| Usable Rack Area (m ²) | 0.321 |
| Net Weight (kg) | 150 |
| Gross Weight (kg) | 170 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 10 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 11 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0.53404 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 800 |
| Bottle 500 mL Loading Unit | 400 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 23 |
| 40" Container Loading Unit | 49 |
| 40" High Container Loading Unit | 48/49 |
| 13.6 m Truck Loading Unit | 57 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2215 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 740 |
| Net Volume (L) | 673 |
| Internal Dimensions (w*d*h) (mm) | 806*594*1570 |
| External Dimensions (w*d*h) (mm) | 907*720*2015 |
| External Dimensions with Package (w*d*h) (mm) | 947*745*2140 |
| Usable Rack Area (m ²) | 0,39 |
| Net Weight (kg) | 157 |
| Gross Weight (kg) | 168 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 13 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0,653 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 960 |
| Bottle 500 mL Loading Unit | 480 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 18 |
| 40" Container Loading Unit | 39 |
| 40" High Container Loading Unit | 39 |
| 13.6 m Truck Loading Unit | 44 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Self Closing Door
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



900 WOC SD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 749 |
| Net Volume (L) | 683 |
| Internal Dimensions (w*d*h) (mm) | 806*594*1570 |
| External Dimensions (w*d*h) (mm) | 907*732*2020 |
| External Dimensions with Package (w*d*h) (mm) | 947*762*2145 |
| Usable Rack Area (m ²) | 0,39 |
| Net Weight (kg) | 154 |
| Gross Weight (kg) | 165 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 13 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0,664 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 960 |
| Bottle 500 mL Loading Unit | 480 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 18 |
| 40" Container Loading Unit | 39 |
| 40" High Container Loading Unit | 39 |
| 13.6 m Truck Loading Unit | 44 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Self Closing Door
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2020 mm





green cooler



SINGLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



180 C



180 WOC



180 EC



180 EWOC



270 C



270 WOC

| | 180 C | 180 WOC | 180 EC | 180 EWOC | 270 C | 270 WOC |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 195 | 195 | 173 | 173 | 238 |
| | Net Volume (L) | 170 | 170 | 167 | 167 | 226 |
| Packaging | Internal Dimensions (w*d*h) (mm) | 357*365*1410 | 357*365*1410 | 357.5*363.5*1417 | 357.5*363,5*1417 | 355*465*1442 |
| | External Dimensions (w*d*h) (mm) | 435*516*2008.5 | 435*512*1805 | 435*517*2010 | 435*517*1832 | 455*623*2031 |
| | External Dimensions with Package (w*d*h) (mm) | 475*550*2143.5 | 470*545*1944 | 475*558*2143 | 470*535*1967 | 490*700*2163 |
| | Net Weight (kg) | 70 | 73 | | | 93 |
| Product Loading | Gross Weight (kg) | 78 | 79 | | | 101 |
| | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 | 5 | 5 | 5 | 5 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 | 4 | 4 | 4 | 6 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 | 6 | 6 | 6 | 6 |
| Technical Specifications | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 | 5 | 5 | 5 | 7 |
| | Product Display Area (m ²) | 0,22 | 0,22 | 0,26 | 0,26 | 0,28 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 195 | 195 | 170 | 170 | 300 |
| | Bottle 500 mL Loading Unit | 120 | 120 | 100 | 115 | 203 |
| | Number of Shelves | 5 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 40 | 40 | 38 | 40 | 50 |
| Logistics | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 48 | 48 | 48 | 48 | 36 |
| | 40" Container Loading Unit | 100 | 100 | 100 | 100 | 72 |
| | 40" High Container Loading Unit | 100 | 100 | 100 | 100 | 72 |
| | 13.6 m Truck Loading Unit | 120 | 120 | 120 | 120 | 95 |

SINGLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



290 C



290 WOC



295 C



295 WOC



375 EC



375 EWOC

| | 290 C | 290 WOC | 295 C | 295 WOC | 375 EC | 375 EWOC | |
|----------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|--------------|
| Dimensions | Gross Volume (L) | 297 | 297 | 316 | 316 | 358 | 358 |
| | Net Volume (L) | 283 | 276 | 303 | 303 | 345 | 345 |
| | Internal Dimensions (w*d*h) (mm) | 424*496*1408 | 424*496*1408 | 424*496*1499 | 424*496*1499 | 516*470*1555 | 516*470*1555 |
| | External Dimensions (w*d*h) (mm) | 500*640*2023,5 | 500*640*1820 | 500*640*2147 | 500*640*1920 | 590*629*2005 | 590*629*1817 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 535*670*2150 | 535*670*1957 | 535*670*2250 | 515*700*2150 | 605*655*2142 | 605*655*1953 |
| | Net Weight (kg) | 99 | 93 | - | - | 72 | 67,8 |
| | Gross Weight (kg) | 104 | 99 | - | - | 80 | 75,8 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 | 6 | 6 | 6 | 7 | 7 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 6 | 6 | 5 | 5 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 | 7 | 7 | 7 | 8 | 8 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 7 | 7 | 6 | 6 |
| | Product Display Area (m ²) | 0,32 | 0,32 | 0,32 | 0,32 | 0,372 | 0,372 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 360 | 360 | 360 | 360 | 410 | 410 |
| Bottle 500 mL Loading Unit | 204 | 204 | 204 | 204 | 246 | 246 | |
| Technical Specifications | Number of Shelves | 5 | 5 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 38 | 38 | 38 | 38 | 38 | 38 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C | B/C |
| Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | |
| Logistics | 20" Container Loading Unit | 33 | 33 | 33 | 33 | 27 | 27 |
| | 40" Container Loading Unit | 71 | 71 | 71 | 71 | 57 | 57 |
| | 40" High Container Loading Unit | 71 | 71 | 71 | 71 | 57 | 57 |
| | 13.6 m Truck Loading Unit | 80 | 80 | 80 | 80 | 76 | 76 |

SINGLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



250 C



250 WOC



380 WOC



380 C



410 WOC



412 WOC

| | | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 240 | 240 | 352 | 352 | 385 | 385 |
| | Net Volume (L) | 225 | 225 | 343 | 343 | 363 | 352 |
| | Internal Dimensions (w*d*h) (mm) | 490*465.5*1091 | 490*465*1091 | 490*465*1555 | 490*465*1555 | 490*465*1737 | 490*465,5*1737 |
| | External Dimensions (w*d*h) (mm) | 592.5*624*1540.5 | 592.5*624*1365 | 590*620*1840 | 590*620*2005 | 590*620*2015 | 590*580*2015 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 632.5*660*1670 | 632.5*660*1505 | 610*640*1972 | 610*640*2138.5 | 655*650*2145 | 630*685*2150 |
| | Net Weight (kg) | 81 | 78 | 96 | 100 | 105 | |
| | Gross Weight (kg) | 87 | 83 | 101.5 | 106 | 115 | |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 | 7 | 7 | 7 | 7 | 7 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 6 | 6 | 6 | 7 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 | 8 | 8 | 8 | 8 | 8 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 7 | 7 | 7 | 8 |
| | Product Display Area (m ²) | 0,36 | 0,36 | 0,36 | 0,36 | 0,36 | 0,34 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 343 | 343 | 420 | 420 | 420 | 498 |
| Technical Specifications | Bottle 500 mL Loading Unit | 189 | 189 | 256 | 256 | 256 | 245 |
| | Number of Shelves | 4 | 4 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 26 | 26 | 26 | 26 | 26 | 26 |
| | 40" Container Loading Unit | 57 | 57 | 57 | 57 | 57 | 57 |
| | 40" High Container Loading Unit | 57 | 57 | 57 | 57 | 57 | 57 |
| | 13.6 m Truck Loading Unit | 80 | 80 | 80 | 80 | 80 | 80 |

SINGLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



390 C



390 WOC



420 C



420 WOC



400 WOC

| | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 348 | 348 | 357 | 415 | 397 |
| | Net Volume (L) | 328 | 328 | 336 | 394 | 389 |
| | Internal Dimensions (w*d*h) (mm) | 490*485*1458 | 490*487.5*1458.5 | 489*490*1499 | 489*485*1700 | 490*465*1862 |
| | External Dimensions (w*d*h) (mm) | 590*645*2005 | 590*645*1840 | 590*645*2147 | 590*645*2147 | 590*620*2025 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 610*681.5*2140 | 610*681.5*1980 | 630*655*2270 | 630*655*2270 | 655*640*2135 |
| | Net Weight (kg) | 102 | 100 | - | - | 125 |
| | Gross Weight (kg) | 108.5 | 110 | - | - | 135 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 | 7 | 7 | 7 | 7 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 | 7 | 7 | 7 | 7 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 | 8 | 8 | 8 | 8 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 | 8 | 8 | 8 | 8 |
| | Product Display Area (m ²) | 0,357 | 0,357 | 0,357 | 0,357 | 0,365 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 498 | 498 | 498 | 498 | 498 |
| Technical Specifications | Bottle 500 mL Loading Unit | 245 | 245 | 245 | 245 | 245 |
| | Number of Shelves | 5 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 26 | 26 | 26 | 26 | 26 |
| | 40" Container Loading Unit | 57 | 57 | 57 | T | 57 |
| | 40" High Container Loading Unit | 57 | 57 | 57 | 57 | 57 |
| | 13.6 m Truck Loading Unit | 75 | 75 | 75 | 75 | 75 |

SINGLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



670 C



670 WOC



660 C



660 WOC



900 C SD



900 WOC SD

| | | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 627 | 637 | 640 | 649 | 740 | 749 |
| | Net Volume (L) | 575 | 584 | 565 | 568 | 673 | 683 |
| | Internal Dimensions (w*d*h) (mm) | 624*643*1371 | 624*643*1607 | 690*553*1702 | 690*553*1702 | 806*594*1570 | 806*594*1570 |
| | External Dimensions (w*d*h) (mm) | 725*760*2060 | 725*760*2060 | 790.5*676*2140 | 790.5*665*2215 | 907*720*2015 | 907*732*2020 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 751*776*2200 | 751*776*2200 | 796*700*2280 | 830*690*2335 | 947*745*2140 | 947*762*2145 |
| | Net Weight (kg) | 134 | 136 | 150 | 150 | 157 | 154 |
| | Gross Weight (kg) | 144 | 146 | 170 | 170 | 168 | 165 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 9 | 9 | 10 | 10 | 12 | 12 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 9 | 9 | 8 | 8 | 8 | 8 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 10 | 10 | 11 | 11 | 13 | 13 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 10 | 10 | 9 | 9 | 9 | 9 |
| | Product Display Area (m ²) | 0,551 | 0,551 | 0,531 | 0,53404 | 0,653 | 0,664 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 810 | 810 | 800 | 800 | 960 | 960 |
| Technical Specifications | Bottle 500 mL Loading Unit | 405 | 405 | 400 | 400 | 480 | 480 |
| | Number of Shelves | 5 | 5 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R290a | R290a | R290a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| Logistics | 20" Container Loading Unit | 21 | 21 | 23 | 23 | 18 | 18 |
| | 40" Container Loading Unit | 48 | 48 | 49 | 49 | 39 | 39 |
| | 40" High Container Loading Unit | 48 | 48 | 49 | 48/49 | 39 | 39 |
| | 13.6 m Truck Loading Unit | 54 | 54 | 57 | 57 | 44 | 44 |



Green Cooler is a vision center beyond being a cooler production factory. Our dynamic team aims to bring a new perspective in the sector by means of unique designs, aesthetic lines and an unlimited imagination. It creates not only coolers but also a different sense of brand and quality.

**our design
policy**

Double Door Vertical Coolers





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 740 |
| Net Volume (L) | 673 |
| Internal Dimensions (w*d*h) (mm) | 806*594*1570 |
| External Dimensions (w*d*h) (mm) | 907*720*2015 |
| External Dimensions with Package (w*d*h) (mm) | 947*745*2140 |
| Usable Rack Area (m ²) | 0,39 |
| Net Weight (kg) | 157 |
| Gross Weight (kg) | 168 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 13 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0,653 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 960 |
| Bottle 500 mL Loading Unit | 480 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 18 |
| 40" Container Loading Unit | 39 |
| 40" High Container Loading Unit | 39 |
| 13.6 m Truck Loading Unit | 44 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2015 mm



900 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 749 |
| Net Volume (L) | 683 |
| Internal Dimensions (w*d*h) (mm) | 806*594*1570 |
| External Dimensions (w*d*h) (mm) | 907*732*2020 |
| External Dimensions with Package (w*d*h) (mm) | 947*762*2145 |
| Usable Rack Area (m ²) | 0,39 |
| Net Weight (kg) | 154 |
| Gross Weight (kg) | 165 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 13 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 0,653 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 480 |
| Bottle 500 mL Loading Unit | 480 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 18 |
| 40" Container Loading Unit | 39 |
| 40" High Container Loading Unit | 39 |
| 13.6 m Truck Loading Unit | 44 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2020 mm



900 WOC Sliding



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 749 |
| Net Volume (L) | 683 |
| Internal Dimensions (w*d*h) (mm) | 805*543*1570 |
| External Dimensions (w*d*h) (mm) | 907*677*2020 |
| External Dimensions with Package (w*d*h) (mm) | 920*733*2155 |
| Usable Rack Area (m ²) | 0,393 |
| Net Weight (kg) | 151 |
| Gross Weight (kg) | 161 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 14 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0,61 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 960 |
| Bottle 500 mL Loading Unit | 385 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 18 |
| 40" Container Loading Unit | 39 |
| 40" High Container Loading Unit | 39 |
| 13.6 m Truck Loading Unit | 44 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2020 mm



1200 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 909 |
| Net Volume (L) | 885 |
| Internal Dimensions (w*d*h) (mm) | 1104*420*1695 |
| External Dimensions (w*d*h) (mm) | 1204*640*2142 |
| External Dimensions with Package (w*d*h) (mm) | 1224*671*2280 |
| Usable Rack Area (m ²) | 0,51 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 16 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 14 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 18 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 14 |
| Product Display Area (m ²) | 0,77 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1100 |
| Bottle 500 mL Loading Unit | 550 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 13 |
| 40" Container Loading Unit | 28 |
| 40" High Container Loading Unit | 28 |
| 13.6 m Truck Loading Unit | 40 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1500 WOC ST DD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1220 |
| Net Volume (L) | 1077 |
| Internal Dimensions (w*d*h) (mm) | 1400*551.2*1582 |
| External Dimensions (w*d*h) (mm) | 1500*670*2045 |
| External Dimensions with Package (w*d*h) (mm) | 1520*701*2181 |
| Usable Rack Area (m ²) | 0,623 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,005 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 |
| Bottle 500 mL Loading Unit | 817 |
| Number of Shelves | 2*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 26 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1500 WOC H DD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1303 |
| Net Volume (L) | 1078 |
| Internal Dimensions (w*d*h) (mm) | 1400*551.2*1682 |
| External Dimensions (w*d*h) (mm) | 1500*670*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1520*701*2281 |
| Usable Rack Area (m ²) | 0,623 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,005 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 |
| Bottle 500 mL Loading Unit | 881 |
| Number of Shelves | 2*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 26 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 ST DD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1313 |
| Net Volume (L) | 1157 |
| Internal Dimensions (w*d*h) (mm) | 1500*551.2*1582 |
| External Dimensions (w*d*h) (mm) | 1600*670*2045 |
| External Dimensions with Package (w*d*h) (mm) | 1620*701*2181 |
| Usable Rack Area (m ²) | 0,666 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 26 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,072 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1320 |
| Bottle 500 mL Loading Unit | 837 |
| Number of Shelves | 2*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 WOC H DD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1396 |
| Net Volume (L) | 1239 |
| Internal Dimensions (w*d*h) (mm) | 1500*551.2*1682 |
| External Dimensions (w*d*h) (mm) | 1600*670*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1620*701*2281 |
| Usable Rack Area (m ²) | 0,666 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 26 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,072 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1320 |
| Bottle 500 mL Loading Unit | 967 |
| Number of Shelves | 2*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 WOC HD DD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1573 |
| Net Volume (L) | 1390 |
| Internal Dimensions (w*d*h) (mm) | 1500*621.1*1682 |
| External Dimensions (w*d*h) (mm) | 1600*740*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1620*771*2281 |
| Usable Rack Area (m ²) | 0,769 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 26 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 1,184 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1540 |
| Bottle 500 mL Loading Unit | 1228 |
| Number of Shelves | 2*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 10 |
| 40" Container Loading Unit | 21 |
| 40" High Container Loading Unit | 21 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2145 mm



DOUBLE DOOR VERTICAL COOLERS



900 C



900 WOC



900 WOC Sliding



1200 WOC



1500 WOC ST DD

TECHNICAL SPECIFICATIONS

| | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 740 | 749 | 749 | 909 | 1220 |
| | Net Volume (L) | 673 | 683 | 683 | 885 | 1077 |
| | Internal Dimensions (w*d*h) (mm) | 806*594*1570 | 806*594*1570 | 805*543*1570 | 1104*420*1695 | 1400*551.2*1582 |
| | External Dimensions (w*d*h) (mm) | 907*720*2015 | 907*732*2020 | 907*677*2020 | 1204*640*2142 | 1500*670*2045 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 947*745*2140 | 947*762*2145 | 920*733*2155 | 1224*671*2280 | 1520*701*2181 |
| | Net Weight (kg) | 157 | 154 | 151 | | |
| | Gross Weight (kg) | 168 | 165 | 161 | | |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 | 12 | 12 | 16 | 21 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 | 8 | 7 | 14 | 6 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 13 | 13 | 14 | 18 | 24 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 | 9 | 8 | 14 | 7 |
| | Product Display Area (m ²) | 0,653 | 0,653 | 0,61 | 0,77 | 1,005 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 960 | 960 | 960 | 1100 | 1260 |
| | Bottle 500 mL Loading Unit | 480 | 480 | 385 | 550 | 817 |
| Technical Specifications | Number of Shelves | 5 | 5 | 5 | 5 | 2*5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0/ 10 C° |
| | Refrigerant | R290a | R290a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| Logistics | 20" Container Loading Unit | 18 | 18 | 18 | 13 | 11 |
| | 40" Container Loading Unit | 39 | 39 | 39 | 28 | 24 |
| | 40" High Container Loading Unit | 39 | 39 | 39 | 28 | 24 |
| | 13.6 m Truck Loading Unit | 44 | 44 | 44 | 40 | 26 |

DOUBLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



1500 WOC H DD



1600 ST DD



1600 WOC H DD



1600 WOC HD DD

| | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 1303 | 1313 | 1396 | 1573 |
| | Net Volume (L) | 1078 | 1157 | 1239 | 1390 |
| Packaging | Internal Dimensions (w*d*h) (mm) | 1400*551.2*1682 | 1500*551.2*1582 | 1500*551.2*1682 | 1500*621.1*1682 |
| | External Dimensions (w*d*h) (mm) | 1500*670*2145 | 1600*670*2045 | 1600*670*2145 | 1600*740*2145 |
| Product Loading | External Dimensions with Package (w*d*h) (mm) | 1520*701*2281 | 1620*701*2181 | 1620*701*2281 | 1620*771*2281 |
| | Net Weight (kg) | | | | |
| Technical Specifications | Gross Weight (kg) | | | | |
| | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 | 22 | 22 | 22 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 6 | 7 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 | 26 | 26 | 26 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 7 | 9 |
| | Product Display Area (m ²) | 1,005 | 1,072 | 1,072 | 1,184 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 | 1320 | 1320 | 1540 |
| Logistics | Bottle 500 mL Loading Unit | 881 | 837 | 967 | 1228 |
| | Number of Shelves | 2*5 | 2*5 | 2*5 | 2*5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0/ 10 C° | 0/ 10 C° | 0/ 10 C° | 0/ 10 C° |
| | Refrigerant | R290a | R290a | R290a | R290a |
| Logistics | Climate Class | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 11 | 11 | 11 | 10 |
| | 40" Container Loading Unit | 24 | 24 | 24 | 21 |
| Logistics | 40" High Container Loading Unit | 24 | 24 | 24 | 21 |
| | 13.6 m Truck Loading Unit | 26 | 24 | 24 | 24 |

Triple Door Vertical Coolers



1500 WOC ST TD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1220 |
| Net Volume (L) | 1073 |
| Internal Dimensions (w*d*h) (mm) | 1400*551.2*1582 |
| External Dimensions (w*d*h) (mm) | 1500*670*2045 |
| External Dimensions with Package (w*d*h) (mm) | 1520*701*2181 |
| Usable Rack Area (m ²) | 0,621 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,005 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 |
| Bottle 500 mL Loading Unit | 789 |
| Number of Shelves | 3*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 26 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2045 mm



1500 WOC H TD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1303 |
| Net Volume (L) | 1156 |
| Internal Dimensions (w*d*h) (mm) | 1400*551.2*1682 |
| External Dimensions (w*d*h) (mm) | 1500*670*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1520*701*2281 |
| Usable Rack Area (m ²) | 0,621 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,005 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 |
| Bottle 500 mL Loading Unit | 853 |
| Number of Shelves | 3*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 26 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 ST TD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1313 |
| Net Volume (L) | 1153 |
| Internal Dimensions (w*d*h) (mm) | 1500*551.2*1582 |
| External Dimensions (w*d*h) (mm) | 1600*670*2045 |
| External Dimensions with Package (w*d*h) (mm) | 1620*701*2181 |
| Usable Rack Area (m ²) | 0,664 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 26 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,072 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1320 |
| Bottle 500 mL Loading Unit | 844 |
| Number of Shelves | 3*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 H TD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1396 |
| Net Volume (L) | 1234 |
| Internal Dimensions (w*d*h) (mm) | 1500*551.2*1682 |
| External Dimensions (w*d*h) (mm) | 1600*670*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1620*701*2281 |
| Usable Rack Area (m ²) | 0,664 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 26 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 1,072 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1320 |
| Bottle 500 mL Loading Unit | 974 |
| Number of Shelves | 3*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 11 |
| 40" Container Loading Unit | 24 |
| 40" High Container Loading Unit | 24 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



1600 HD TD



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 1573 |
| Net Volume (L) | 1385 |
| Internal Dimensions (w*d*h) (mm) | 1500*621.1*1682 |
| External Dimensions (w*d*h) (mm) | 1600*740*2145 |
| External Dimensions with Package (w*d*h) (mm) | 1620*771*2281 |
| Usable Rack Area (m ²) | 0,766 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 22 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 25 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 9 |
| Product Display Area (m ²) | 1,184 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 1540 |
| Bottle 500 mL Loading Unit | 1221 |
| Number of Shelves | 3*5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0/ 10 C° |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 10 |
| 40" Container Loading Unit | 21 |
| 40" High Container Loading Unit | 21 |
| 13.6 m Truck Loading Unit | 24 |

Optional Specifications *(Mechanic)*


- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



TRIPLE DOOR VERTICAL COOLERS

TECHNICAL SPECIFICATIONS



1500 WOC ST TD



1500 WOC H TD



1600 ST TD



1600 H TD



1600 HD TD

| | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 1220 | 1303 | 1313 | 1396 | 1573 |
| | Net Volume (L) | 1073 | 1156 | 1153 | 1234 | 1385 |
| | Internal Dimensions (w*d*h) (mm) | 1400*551.2*1582 | 1400*551.2*1682 | 1500*551.2*1582 | 1500*551.2*1682 | 1500*621.1*1682 |
| | External Dimensions (w*d*h) (mm) | 1500*670*2045 | 1500*670*2145 | 1600*670*2045 | 1600*670*2145 | 1600*740*2145 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 1520*701*2181 | 1520*701*2281 | 1620*701*2181 | 1620*701*2281 | 1620*771*2281 |
| | Net Weight (kg) | | | | | |
| | Gross Weight (kg) | | | | | |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 21 | 21 | 22 | 22 | 22 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 6 | 6 | 7 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 24 | 24 | 26 | 26 | 25 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 7 | 7 | 9 |
| | Product Display Area (m ²) | 1,005 | 1,005 | 1,072 | 1,072 | 1,184 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 1260 | 1260 | 1320 | 1320 | 1540 |
| | Bottle 500 mL Loading Unit | 789 | 853 | 844 | 974 | 1221 |
| Technical Specifications | Number of Shelves | 3*5 | 3*5 | 3*5 | 3*5 | 3*5 |
| | Insulation Thickness (mm) | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0/ 10 C° | 0/ 10 C° | 0/ 10 C° | 0/ 10 C° | 0/ 10 C° |
| | Refrigerant | R290a | R290a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 11 | 11 | 11 | 11 | 10 |
| | 40" Container Loading Unit | 24 | 24 | 24 | 24 | 21 |
| | 40" High Container Loading Unit | 24 | 24 | 24 | 24 | 21 |
| | 13.6 m Truck Loading Unit | 26 | 26 | 24 | 24 | 24 |



Triple door vertical coolers allow particularly brands for displaying their products in supermarkets so that they are able to promote their brand recognition. This cooler option, in which product groups and respective products maintain their coolness all together, presents a stylish solution particularly for beverages.

Single Door Vertical Freezers





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 195 |
| Net Volume (L) | 170 |
| Internal Dimensions (w*d*h) (mm) | 357*366*1410 |
| External Dimensions (w*d*h) (mm) | 435*516,5*2008,5 |
| External Dimensions with Package (w*d*h) (mm) | 464*574*2138,5 |
| Usable Rack Area (m ²) | 0,1 |
| Net Weight (kg) | 70 |
| Gross Weight (kg) | 76 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,22 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 6 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | -18 / -24 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2008,5 mm



377 C VF



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 358 |
| Net Volume (L) | 345 |
| Internal Dimensions (w*d*h) (mm) | 516*470*1555 |
| External Dimensions (w*d*h) (mm) | 640*630*1875.5 |
| External Dimensions with Package (w*d*h) (mm) | 655*645*2000 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 82 |
| Gross Weight (kg) | 90 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,403 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 6 |
| Insulation Thickness (mm) | 60 |
| Working Temperature Range °C | -18 / -24 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 27 |
| 40" Container Loading Unit | 54 |
| 40" High Container Loading Unit | 54 |
| 13.6 m Truck Loading Unit | 63 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

1875,5 mm





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 348 |
| Net Volume (L) | 328 |
| Internal Dimensions (w*d*h) (mm) | 490*487.5*1458.5 |
| External Dimensions (w*d*h) (mm) | 590*606.5*2006.5 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*2140 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 102 |
| Gross Weight (kg) | 108.5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 6 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | -18 / -24 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Framed Canopy - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body

2006,5 mm



390 WOC VF



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 348 |
| Net Volume (L) | 328 |
| Internal Dimensions (w*d*h) (mm) | 490*487.5*1458.5 |
| External Dimensions (w*d*h) (mm) | 590*606.5*1844 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*1980 |
| Usable Rack Area (m ²) | 0.192 |
| Net Weight (kg) | 100 |
| Gross Weight (kg) | 110 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,357 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 6 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | -18 / -24 °C |
| Refrigerant | R290a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

Door Lock
Price Label
Changing Door Direction
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Self Closing Door
Mechanical Thermostat
Two Adjustable Feet
Horizontal LED Lighting
Metal Inner Body



SINGLE DOOR VERTICAL FREEZERS

TECHNICAL SPECIFICATIONS



180 C VF



377 C VF



390 C VF



390 WOC VF

| | 180 C VF | 377 C VF | 390 C VF | 390 WOC VF | |
|--------------------------|---|-------------------|-------------------|-------------------|------------------|
| Dimensions | Gross Volume (L) | 195 | 358 | 348 | |
| | Net Volume (L) | 170 | 345 | 328 | |
| | Internal Dimensions (w*d*h) (mm) | 357*366*1410 | 516*470*1555 | 490*487.5*1458.5 | 490*487.5*1458.5 |
| | External Dimensions (w*d*h) (mm) | 435*516,5*2008,5 | 640*630*1875,5 | 590*606.5*2006.5 | 590*606.5*1844 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 464*574*2138,5 | 655*645*2000 | 610*640*2140 | 610*640*1980 |
| | Net Weight (kg) | 70 | 82 | 102 | 100 |
| | Gross Weight (kg) | 76 | 90 | 108.5 | 110 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA | NA | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA | NA | NA | NA |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA | NA | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA | NA | NA | NA |
| | Product Display Area (m²) | 0,22 | 0,403 | 0,357 | 0,357 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | NA | NA | NA | NA |
| | Bottle 500 mL Loading Unit | NA | NA | NA | NA |
| Technical Specifications | Number of Shelves | 6 | 6 | 6 | 6 |
| | Insulation Thickness (mm) | 40 | 60 | 50 | 50 |
| | Working Temperature Range °C | -18 / -24 °C | -18 / -24 °C | -18 / -24 °C | -18 / -24 °C |
| | Refrigerant | R290a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C |
| Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | |
| Logistics | 20" Container Loading Unit | 48 | 27 | 26 | 26 |
| | 40" Container Loading Unit | 100 | 54 | 57 | 57 |
| | 40" High Container Loading Unit | 100 | 54 | 57 | 57 |
| | 13.6 m Truck Loading Unit | 120 | 63 | 80 | 80 |

Combi



300 KOMBI



SPECIFICATIONS

| | |
|---|---|
| Gross Volume (L) | 218 |
| Net Volume (L) | 120 |
| Internal Dimensions (w*d*h) (mm) | 489*485*991 (Cooler) 489*485*438 (Freezer) |
| External Dimensions (w*d*h) (mm) | 590*647*2118 |
| External Dimensions with Package (w*d*h) (mm) | 624*680*2255 |
| Usable Rack Area (m ²) | 0.199 |
| Net Weight (kg) | 127 |
| Gross Weight (kg) | 137 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 8 |
| Product Display Area (m ²) | 0.393 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 269 |
| Bottle 500 mL Loading Unit | 142 |
| Number of Shelves | 3 |
| Insulation Thickness (mm) | 50 mm (Cooler) 100 mm (Freezer) |
| Working Temperature Range °C | 0 / +10 °C (Cooler) -10 / -22 °C (Freezer) |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 27 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications (Mechanic)

- Door Lock
- Price Label
- Changing Door Direction
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications (Electric)

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



Under Counter Mini Coolers



MC 60 WOC

SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 63 |
| Net Volume (L) | 56 |
| Internal Dimensions (w*d*h) (mm) | 354*415*531 |
| External Dimensions (w*d*h) (mm) | 451*543*724 |
| External Dimensions with Package (w*d*h) (mm) | 491*567*813 |
| Usable Rack Area (m ²) | 0,11 |
| Net Weight (kg) | 31 |
| Gross Weight (kg) | 36 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 6 |
| Product Display Area (m ²) | 0,24 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 61 |
| Bottle 500 mL Loading Unit | 41 |
| Number of Shelves | 1 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 96 |
| 40" Container Loading Unit | 192 |
| 40" High Container Loading Unit | 288 |
| 13.6 m Truck Loading Unit | 324 |

Optional Specifications (Mechanic)

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications (Electric)

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Self Closing Door
Mechanical Thermostat
Two Adjustable Feet
Horizontal LED Lighting
Metal Inner Body



MC 85 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 76 |
| Net Volume (L) | 71 |
| Internal Dimensions (w*d*h) (mm) | 355*365*740 |
| External Dimensions (w*d*h) (mm) | 434*514*828.5 |
| External Dimensions with Package (w*d*h) (mm) | 474*539*892.5 |
| Usable Rack Area (m ²) | 0,1035 |
| Net Weight (kg) | 35 |
| Gross Weight (kg) | 39 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,211 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 88 |
| Bottle 500 mL Loading Unit | 40 |
| Number of Shelves | 1 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 96 |
| 40" Container Loading Unit | 200 |
| 40" High Container Loading Unit | 286 |
| 13.6 m Truck Loading Unit | 375 |

Optional Specifications (Mechanic)

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Canopy without Frame - Shutter

Optional Specifications (Electric)

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



MC 88 WOC

SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 76 |
| Net Volume (L) | 71 |
| Internal Dimensions (w*d*h) (mm) | 740*365*355 |
| External Dimensions (w*d*h) (mm) | 810*510*450 |
| External Dimensions with Package (w*d*h) (mm) | 850*550*519 |
| Usable Rack Area (m ²) | 0,152 |
| Net Weight (kg) | 35 |
| Gross Weight (kg) | 39 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 10 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 6 |
| Product Display Area (m ²) | 0,41 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 102 |
| Bottle 500 mL Loading Unit | 35 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 104 |
| 40" Container Loading Unit | 224 |
| 40" High Container Loading Unit | 280 |
| 13.6 m Truck Loading Unit | 320 |

Optional Specifications *(Mechanic)*

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Self Closing Door
Mechanical Thermostat
Two Adjustable Feet
Horizontal LED Lighting
Metal Inner Body



BB 100 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 80 |
| Net Volume (L) | 75 |
| Internal Dimensions (w*d*h) (mm) | 281*454*686 |
| External Dimensions (w*d*h) (mm) | 361*606*853 |
| External Dimensions with Package (w*d*h) (mm) | 401*636*978 |
| Usable Rack Area (m ²) | 0,106 |
| Net Weight (kg) | |
| Gross Weight (kg) | |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,218 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 102 |
| 40" Container Loading Unit | 216 |
| 40" High Container Loading Unit | 216 |
| 13.6 m Truck Loading Unit | 252 |

Optional Specifications *(Mechanic)*

Door Lock
 Price Label
 Night Cover
 Bottle Opener - Bottle Cap Collector
 Block Door
 Inclined Shelf
 Custom Exterior
 Transparent Sticker on Glass
 Raised Canopy
 Stainless Steel Outer Body
 Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
 Remote Control Lock
 Energy Management Control
 Light Switch
 Digital Thermometer
 Horizontal LED Lighting
 LED Lighting on Shelf
 IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
 Self Closing Door
 Mechanical Thermostat
 Two Adjustable Feet
 Horizontal LED Lighting
 Metal Inner Body



BB 110 WOC

SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 104 |
| Net Volume (L) | 98 |
| Internal Dimensions (w*d*h) (mm) | 355*456*720.5 |
| External Dimensions (w*d*h) (mm) | 455*610.6*900.5 |
| External Dimensions with Package (w*d*h) (mm) | 495*635.6*925.5 |
| Usable Rack Area (m ²) | 0,136 |
| Net Weight (kg) | 39 |
| Gross Weight (kg) | 45 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,278 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 95 |
| Bottle 500 mL Loading Unit | 80 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 72 |
| 40" Container Loading Unit | 144 |
| 40" High Container Loading Unit | 144 |
| 13.6 m Truck Loading Unit | 168 |



Optional Specifications (Mechanic)

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications (Electric)

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



BB 170 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 134 |
| Net Volume (L) | 125 |
| Internal Dimensions (w*d*h) (mm) | 490*464*640.5 |
| External Dimensions (w*d*h) (mm) | 592*617*866 |
| External Dimensions with Package (w*d*h) (mm) | 632*643*961.5 |
| Usable Rack Area (m ²) | 0,193 |
| Net Weight (kg) | 56 |
| Gross Weight (kg) | 62 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 8 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 182 |
| Bottle 500 mL Loading Unit | 112 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 54 |
| 40" Container Loading Unit | 114 |
| 40" High Container Loading Unit | 114 |
| 13.6 m Truck Loading Unit | 126 |

Optional Specifications (Mechanic)

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications (Electric)

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Self Closing Door
Mechanical Thermostat
Two Adjustable Feet
Horizontal LED Lighting
Metal Inner Body



BB 230 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 183 |
| Net Volume (L) | 163 |
| Internal Dimensions (w*d*h) (mm) | 806*399*670.5 |
| External Dimensions (w*d*h) (mm) | 907*530*868 |
| External Dimensions with Package (w*d*h) (mm) | 947*552*900 |
| Usable Rack Area (m ²) | 0,244 |
| Net Weight (kg) | 77,25 |
| Gross Weight (kg) | 82,5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 14 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,48 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 192 |
| Bottle 500 mL Loading Unit | 120 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 124 |

Optional Specifications *(Mechanic)*

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Self Closing Door
Mechanical Thermostat
Two Adjustable Feet
Horizontal LED Lighting
Metal Inner Body



BB 240 WOC



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 285 |
| Net Volume (L) | 243 |
| Internal Dimensions (w*d*h) (mm) | 1263.5*399*670.5 |
| External Dimensions (w*d*h) (mm) | 1363.5*545*866 |
| External Dimensions with Package (w*d*h) (mm) | 1405*585*960 |
| Usable Rack Area (m ²) | 0,1122*3 |
| Net Weight (kg) | 78 |
| Gross Weight (kg) | 83 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 15 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 18 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 |
| Product Display Area (m ²) | 0,74 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 316 |
| Bottle 500 mL Loading Unit | 211 |
| Number of Shelves | 3*2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 32 |
| 40" Container Loading Unit | 66 |
| 40" High Container Loading Unit | 66 |
| 13.6 m Truck Loading Unit | 74 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



BB 230 Sliding



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 179 |
| Net Volume (L) | 172 |
| Internal Dimensions (w*d*h) (mm) | 806*346*670 |
| External Dimensions (w*d*h) (mm) | 906*454*866 |
| External Dimensions with Package (w*d*h) (mm) | 915.5*470*952 |
| Usable Rack Area (m ²) | 0,26 |
| Net Weight (kg) | 75 |
| Gross Weight (kg) | 79 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 14 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 4 |
| Product Display Area (m ²) | 0,418 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 108 |
| Bottle 500 mL Loading Unit | 99 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 60 |
| 40" Container Loading Unit | 130 |
| 40" High Container Loading Unit | 130 |
| 13.6 m Truck Loading Unit | 144 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body



BB 240 Sliding



SPECIFICATIONS

| | |
|---|--------------------|
| Gross Volume (L) | 214 |
| Net Volume (L) | 202 |
| Internal Dimensions (w*d*h) (mm) | 1263.5*290.5*670.5 |
| External Dimensions (w*d*h) (mm) | 1363.5*490*885 |
| External Dimensions with Package (w*d*h) (mm) | 1369.5*503.5*952 |
| Usable Rack Area (m ²) | 0,22 |
| Net Weight (kg) | 82 |
| Gross Weight (kg) | 88 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 18 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 20 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 4 |
| Product Display Area (m ²) | 0,67 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 120 |
| Bottle 500 mL Loading Unit | 96 |
| Number of Shelves | 4 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 32 |
| 40" Container Loading Unit | 68 |
| 40" High Container Loading Unit | 68 |
| 13.6 m Truck Loading Unit | 88 |

Optional Specifications (Mechanic)

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications (Electric)

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Self Closing Door
- Mechanical Thermostat
- Two Adjustable Feet
- Horizontal LED Lighting
- Metal Inner Body





Under counter mini coolers are a very useful solution for businesses such as cafes, bars, restaurants thanks to their small dimensions and high qualities. You can preserve all of your products to be served for your guests in a fresh and cool manner by means of these mini coolers. There will be a significant increase in your service speed thanks to these coolers preserving all of your products that should be always kept handy.

MINI COOLERS

TECHNICAL SPECIFICATIONS



MC 60 WOC



MC 85 WOC



BB 100 WOC



BB 110 WOC



BB 170 WOC

| | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 63 | 76 | 80 | 104 | 134 |
| | Net Volume (L) | 56 | 71 | 75 | 98 | 125 |
| Packaging | Internal Dimensions (w*d*h) (mm) | 354*415*531 | 355*365*740 | 281*454*686 | 355*456*720.5 | 490*464*640.5 |
| | External Dimensions (w*d*h) (mm) | 451*543*724 | 434*514*828.5 | 361*606*853 | 455*610.6*900.5 | 592*617*866 |
| Product Loading | External Dimensions with Package (w*d*h) (mm) | 491*567*813 | 474*539*892.5 | 401*636*978 | 495*635.6*925.5 | 632*643*961.5 |
| | Net Weight (kg) | 31 | 35 | | 39 | 56 |
| | Gross Weight (kg) | 36 | 39 | | 45 | 62 |
| Technical Specifications | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 5 | 5 | NA | 5 | 7 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 5 | 4 | NA | 6 | 6 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 6 | 6 | NA | 6 | 8 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 6 | 5 | NA | 7 | 7 |
| | Product Display Area (m²) | 0,24 | 0,211 | 0,218 | 0,278 | 0,365 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 61 | 88 | NA | 95 | 182 |
| | Bottle 500 mL Loading Unit | 41 | 40 | NA | 80 | 112 |
| Logistics | Number of Shelves | 1 | 2 | 2 | 2 | 2 |
| | Insulation Thickness (mm) | 50 | 38 | 38 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| Logistics | Climate Class | B/C | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 96 | 96 | 102 | 72 | 54 |
| | 40" Container Loading Unit | 192 | 200 | 216 | 144 | 114 |
| | 40" High Container Loading Unit | 288 | 286 | 216 | 144 | 114 |
| Logistics | 13.6 m Truck Loading Unit | 324 | 375 | 252 | 168 | 126 |

UNDER BAR COOLERS

TECHNICAL SPECIFICATIONS



MC 88 WOC



BB 230 WOC



BB 240 WOC



BB 230 Sliding



BB 240 Sliding

| | MC 88 WOC | BB 230 WOC | BB 240 WOC | BB 230 Sliding | BB 240 Sliding | |
|---|---|---|-------------------|-------------------|-------------------|--------------------|
| Dimensions | Gross Volume (L) | 76 | 183 | 285 | 179 | 214 |
| | Net Volume (L) | 71 | 163 | 243 | 172 | 202 |
| | Internal Dimensions (w*d*h) (mm) | 740*365*355 | 806*399*670.5 | 1263.5*399*670.5 | 806*346*670 | 1263.5*290.5*670.5 |
| Packaging | External Dimensions (w*d*h) (mm) | 810*510*450 | 907*530*868 | 1363.5*545*866 | 906*454*866 | 1363.5*490*885 |
| | External Dimensions with Package (w*d*h) (mm) | 850*550*519 | 947*552*900 | 1405*585*960 | 915.5*470*952 | 1369.5*503.5*952 |
| | Net Weight (kg) | 35 | 77,25 | 78 | 75 | 82 |
| | Gross Weight (kg) | 39 | 82,5 | 83 | 79 | 88 |
| | Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 10 | 12 | 15 | 12 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | | 5 | 4 | 6 | 4 | 4 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | | 12 | 14 | 18 | 14 | 20 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | | 6 | 5 | 5 | 4 | 4 |
| Product Display Area (m ²) | | 0,41 | 0,48 | 0,74 | 0,418 | 0,67 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | | 102 | 192 | 316 | 108 | 120 |
| Bottle 500 mL Loading Unit | | 35 | 120 | 211 | 99 | 96 |
| Technical Specifications | Number of Shelves | 2 | 2 | 3*2 | 2 | 4 |
| | Insulation Thickness (mm) | 38 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 104 | 48 | 32 | 60 | 32 |
| | 40" Container Loading Unit | 224 | 100 | 66 | 130 | 68 |
| | 40" High Container Loading Unit | 280 | 100 | 66 | 130 | 68 |
| | 13.6 m Truck Loading Unit | 320 | 124 | 74 | 144 | 88 |

can cooler

Can Cooler coolers are economical and stylish fridges which can be comfortably used particularly by end users and which are enriched with user-friendly apparatuses and design properties.





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 46 |
| Net Volume (L) | 45 |
| Internal Dimensions (w*d*h) (mm) | Ø378*410 |
| External Dimensions (w*d*h) (mm) | Ø454*825 |
| External Dimensions with Package (w*d*h) (mm) | 900*550*550 |
| Usable Rack Area (m ²) | - |
| Net Weight (kg) | 26 |
| Gross Weight (kg) | 29 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | NA |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | NA |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 104 |
| 40" Container Loading Unit | 220 |
| 40" High Container Loading Unit | 220 |
| 13.6 m Truck Loading Unit | 315 |

Optional Specifications *(Mechanic)*

- Price Label
- Night Cover
- Custom Exterior
- Transparent Sticker on Glass
- Stainless Steel Outer Body
- Fastening Kit

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- Horizontal LED Lighting
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Door System
- Four Wheels + Two Adjustable Feet
- Mechanical Thermostat
- Two Pieces of Gradual Baskets





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 61 |
| Net Volume (L) | 60 |
| Internal Dimensions (w*d*h) (mm) | Ø378*517 |
| External Dimensions (w*d*h) (mm) | ø454*932 |
| External Dimensions with Package (w*d*h) (mm) | 1007*550*550 |
| Usable Rack Area (m ²) | - |
| Net Weight (kg) | 33 |
| Gross Weight (kg) | 36 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | NA |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | NA |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0/ +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 80 |
| 40" Container Loading Unit | 212 |
| 40" High Container Loading Unit | 212 |
| 13.6 m Truck Loading Unit | 260 |

Optional Specifications *(Mechanic)*

Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Stainless Steel Outer Body
Fastening Kit

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Door System
Four Wheels + Two Adjustable Feet
Mechanical Thermostat
Two Pieces of Gradual Baskets





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 73 |
| Net Volume (L) | 73 |
| Internal Dimensions (w*d*h) (mm) | ø367*720 |
| External Dimensions (w*d*h) (mm) | Ø449*1061 |
| External Dimensions with Package (w*d*h) (mm) | 460*460*1181 |
| Usable Rack Area (m ²) | 0,086 |
| Net Weight (kg) | 26 |
| Gross Weight (kg) | 31 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,15 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 72 |
| Bottle 500 mL Loading Unit | 36 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 120 |
| 40" Container Loading Unit | 260 |
| 40" High Container Loading Unit | 260 |
| 13.6 m Truck Loading Unit | 290 |

Optional Specifications *(Mechanic)*


Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Stainless Steel Outer Body
Fastening Kit

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Door System
Four Wheels + Two Adjustable Feet
Mechanical Thermostat
Two Pieces of Gradual Baskets





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 73 |
| Net Volume (L) | 73 |
| Internal Dimensions (w*d*h) (mm) | ø367*720 |
| External Dimensions (w*d*h) (mm) | Ø477*1157 |
| External Dimensions with Package (w*d*h) (mm) | 460*460*1277 |
| Usable Rack Area (m ²) | 0,086 |
| Net Weight (kg) | NA |
| Gross Weight (kg) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,15 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 72 |
| Bottle 500 mL Loading Unit | 36 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 60 |
| 40" Container Loading Unit | 130 |
| 40" High Container Loading Unit | 260 |
| 13.6 m Truck Loading Unit | 290 |

Optional Specifications (Mechanic)

Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Stainless Steel Outer Body
Fastening Kit

Optional Specifications (Electric)

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Door System
Four Wheels + Two Adjustable Feet
Mechanical Thermostat
Two Pieces of Gradual Baskets





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 73 |
| Net Volume (L) | 73 |
| Internal Dimensions (w*d*h) (mm) | ø367*720 |
| External Dimensions (w*d*h) (mm) | ø477*1414 |
| External Dimensions with Package (w*d*h) (mm) | 460*460*1534 |
| Usable Rack Area (m ²) | 0,086 |
| Net Weight (kg) | NA |
| Gross Weight (kg) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,15 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 72 |
| Bottle 500 mL Loading Unit | 36 |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 60 |
| 40" Container Loading Unit | 130 |
| 40" High Container Loading Unit | 130 |
| 13.6 m Truck Loading Unit | 145 |

Optional Specifications *(Mechanic)*


Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Stainless Steel Outer Body
Fastening Kit

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Door System
Four Wheels + Two Adjustable Feet
Mechanical Thermostat
Two Pieces of Gradual Baskets



CAN COOLER

TECHNICAL SPECIFICATIONS



50 R



70 R



75 R



75 C



75 B


| | 50 R | 70 R | 75 R | 75 C | 75 B | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|--------------|
| Dimensions | Gross Volume (L) | 46 | 61 | 73 | 73 | |
| | Net Volume (L) | 45 | 60 | 73 | 73 | |
| | Internal Dimensions (w*d*h) (mm) | Ø378*410 | Ø378*517 | ø367*720 | ø367*720 | ø367*720 |
| | External Dimensions (w*d*h) (mm) | Ø454*825 | ø454*932 | Ø449*1061 | Ø477*1157 | ø477*1414 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 900*550*550 | 1007*550*550 | 460*460*1181 | 460*460*1277 | 460*460*1534 |
| | Net Weight (kg) | 26 | 33 | 26 | NA | NA |
| | Gross Weight (kg) | 29 | 36 | 31 | NA | NA |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA | NA | NA | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA | NA | NA | NA | NA |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA | NA | NA | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA | NA | NA | NA | NA |
| | Product Display Area (m ²) | NA | NA | 0,15 | 0,15 | 0,15 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | NA | NA | 72 | 72 | 72 |
| | Bottle 500 mL Loading Unit | NA | NA | 36 | 36 | 36 |
| Technical Specifications | Number of Shelves | NA | NA | 2 | 2 | 2 |
| | Insulation Thickness (mm) | 40 | 40 | 40 | 40 | 40 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | |
| Logistics | 20" Container Loading Unit | 104 | 80 | 120 | 60 | 60 |
| | 40" Container Loading Unit | 220 | 212 | 260 | 130 | 130 |
| | 40" High Container Loading Unit | 220 | 212 | 260 | 260 | 130 |
| | 13.6 m Truck Loading Unit | 315 | 260 | 290 | 290 | 145 |



Can Cooler is a design of excellence to quickly and easily serve beverages in your picnics, barbecue parties and cocktail activities. Commercial businesses will also be one step ahead in terms of serving beverages thanks to these coolers that will become an irreplaceable element of the activities.

counter front

Counter front fridges are final service areas where customers encounter your products. Therefore, we developed a simple design that will display your products elegantly, keep them fresh and cool and whet consumers' appetite all the time. You will own coolers as consumer-friendly and qualified as industrial alternatives thanks to these counter front fridges.

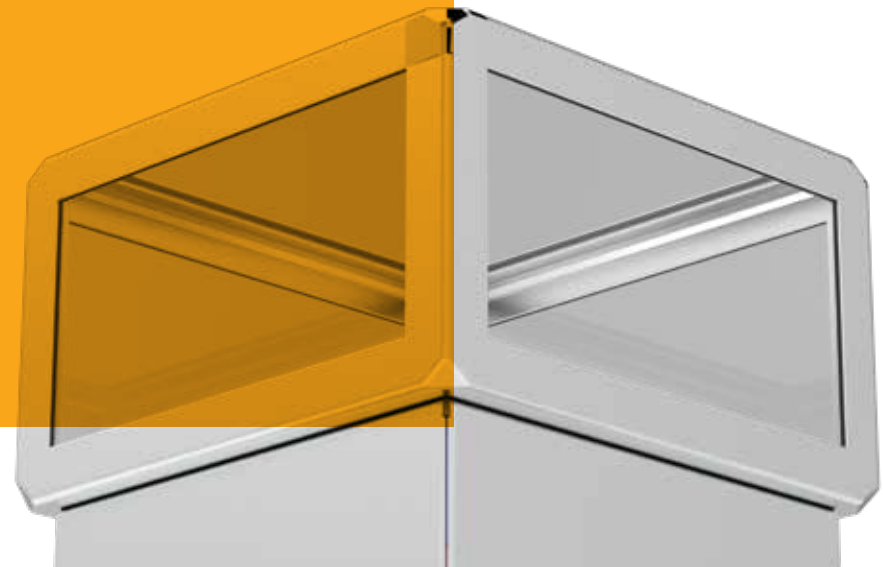



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 98 |
| Net Volume (L) | 85 |
| Internal Dimensions (w*d*h) (mm) | 440*481*405 |
| External Dimensions (w*d*h) (mm) | 592*731*1090 |
| External Dimensions with Package (w*d*h) (mm) | 600*750*1150 |
| Usable Rack Area (m ²) | 0.43 |
| Net Weight (kg) | 48 |
| Gross Weight (kg) | 55 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 60 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | NA |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 54 |
| 40" Container Loading Unit | 120 |
| 40" High Container Loading Unit | 120 |

Optional Specifications *(Mechanic)*


Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Raised Canopy

Optional Specifications *(Electric)*

Digital Thermostat
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf

Standard Specifications

Two adjustable feet



HT 200



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 210 |
| Net Volume (L) | 158 |
| Internal Dimensions (w*d*h) (mm) | 720*720*408 |
| External Dimensions (w*d*h) (mm) | 750*750*981 |
| External Dimensions with Package (w*d*h) (mm) | 779*779*1008 |
| Usable Rack Area (m ²) | - |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 10 |
| Product Display Area (m ²) | 0,562 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 144 |
| Bottle 500 mL Loading Unit | 63 |
| Number of Shelves | - |
| Insulation Thickness (mm) | 56-61 |
| Working Temperature Range °C | +3°C / +5°C |
| Refrigerant | R290 |
| Climate Class | B/C (R134a/R600a) |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 21 |
| 40" Container Loading Unit | 45 |
| 40" High Container Loading Unit | 45 |
| 13.6 m Truck Loading Unit | 51 |

Optional Specifications (Mechanic)

Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body

Optional Specifications (Electric)

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Al. Profiled Outer Case
Double Glass Display Area
Four Movable Wheels
Mechanical Thermostat





SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 300 |
| Net Volume (L) | 222 |
| Internal Dimensions (w*d*h) (mm) | 1020*720*408 |
| External Dimensions (w*d*h) (mm) | 1050*750*981 |
| External Dimensions with Package (w*d*h) (mm) | 1079*779*1008 |
| Usable Rack Area (m ²) | - |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 13 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 16 |
| Product Display Area (m ²) | 0,787 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 208 |
| Bottle 500 mL Loading Unit | 91 |
| Number of Shelves | - |
| Insulation Thickness (mm) | 56-61 |
| Working Temperature Range °C | +3°C / +5°C |
| Refrigerant | R290 |
| Climate Class | B/C (R134a/R600a) |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 15 |
| 40" Container Loading Unit | 33 |
| 40" High Container Loading Unit | 33 |
| 13.6 m Truck Loading Unit | 36 |

Optional Specifications *(Mechanic)*

Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Al. Profiled Outer Case
Double Glass Display Area
Four Movable Wheels
Mechanical Thermostat



HT 400



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 387 |
| Net Volume (L) | 288 |
| Internal Dimensions (w*d*h) (mm) | 1320*720*408 |
| External Dimensions (w*d*h) (mm) | 1350*750*981 |
| External Dimensions with Package (w*d*h) (mm) | 1379*779*1008 |
| Usable Rack Area (m ²) | - |
| Net Weight (kg) | - |
| Gross Weight (kg) | - |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 18 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 8 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 9 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 21 |
| Product Display Area (m ²) | 1,012 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 378 |
| Bottle 500 mL Loading Unit | 119 |
| Number of Shelves | - |
| Insulation Thickness (mm) | 56-61 |
| Working Temperature Range °C | +3°C / +5°C |
| Refrigerant | R290 |
| Climate Class | B/C (R134a/R600a) |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 12 |
| 40" Container Loading Unit | 25 |
| 40" High Container Loading Unit | 25 |
| 13.6 m Truck Loading Unit | 27 |

Optional Specifications (Mechanic)

Price Label
Night Cover
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body

Optional Specifications (Electric)

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
Horizontal LED Lighting
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Al. Profiled Outer Case
Double Glass Display Area
Four Movable Wheels
Mechanical Thermostat



COUNTER FRONT COOLERS

TECHNICAL SPECIFICATIONS



100 TC



HT 200



HT 300



HT 400

| | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 98 | 210 | 300 | 387 |
| | Net Volume (L) | 85 | 158 | 222 | 288 |
| | Internal Dimensions (w*d*h) (mm) | 440*481*405 | 720*720*408 | 1020*720*408 | 1320*720*408 |
| | External Dimensions (w*d*h) (mm) | 592*731*1090 | 750*750*981 | 1050*750*981 | 1350*750*981 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 600*750*1150 | 779*779*1008 | 1079*779*1008 | 1379*779*1008 |
| | Net Weight (kg) | 48 | - | - | - |
| | Gross Weight (kg) | 55 | - | - | - |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 60 | 9 | 13 | 18 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | - | 8 | 8 | 8 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | - | 9 | 9 | 9 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | - | 10 | 16 | 21 |
| | Product Display Area (m ²) | - | 0,562 | 0,787 | 1,012 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | NA | 144 | 208 | 378 |
| | Bottle 500 mL Loading Unit | NA | 63 | 91 | 119 |
| Technical Specifications | Number of Shelves | NA | - | - | - |
| | Insulation Thickness (mm) | 40 | 56-61 | 56-61 | 56-61 |
| | Working Temperature Range °C | 0 / +10 °C | +3°C / +5°C | +3°C / +5°C | +3°C / +5°C |
| | Refrigerant | R600a | R290 | R290 | R290 |
| | Climate Class | B/C | B/C (R134a/R600a) | B/C (R134a/R600a) | B/C (R134a/R600a) |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 54 | 21 | 15 | 12 |
| | 40" Container Loading Unit | 120 | 45 | 33 | 25 |
| | 40" High Container Loading Unit | 120 | 45 | 33 | 25 |
| | 13.6 m Truck Loading Unit | - | 51 | 36 | 27 |

Wine Coolers



170 WOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 134 |
| Net Volume (L) | 125 |
| Internal Dimensions (w*d*h) (mm) | 490*467*640.5 |
| External Dimensions (w*d*h) (mm) | 592*617*866 |
| External Dimensions with Package (w*d*h) (mm) | 632*643*961.5 |
| Usable Rack Area (m ²) | 0,193 |
| Net Weight (kg) | 56 |
| Gross Weight (kg) | 62 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 54 |
| 40" Container Loading Unit | 114 |
| 40" High Container Loading Unit | 114 |
| 13.6 m Truck Loading Unit | 126 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Metal Inner Body



230 WOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 183 |
| Net Volume (L) | 163 |
| Internal Dimensions (w*d*h) (mm) | 806*399*670.5 |
| External Dimensions (w*d*h) (mm) | 907*530*868 |
| External Dimensions with Package (w*d*h) (mm) | 947*552*900 |
| Usable Rack Area (m ²) | 0,244 |
| Net Weight (kg) | 77,25 |
| Gross Weight (kg) | 82,5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,48 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 2 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 124 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Metal Inner Body



180 EWOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 195 |
| Net Volume (L) | 170 |
| Internal Dimensions (w*d*h) (mm) | 357*365*1410 |
| External Dimensions (w*d*h) (mm) | 435*516*2008.5 |
| External Dimensions with Package (w*d*h) (mm) | 475*550*2143.5 |
| Usable Rack Area (m ²) | 0,106 |
| Net Weight (kg) | 70 |
| Gross Weight (kg) | 78 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | NA |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 40 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 48 |
| 40" Container Loading Unit | 100 |
| 40" High Container Loading Unit | 100 |
| 13.6 m Truck Loading Unit | 120 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Plastic Inner Body

2008,5 mm



270 C WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 238 |
| Net Volume (L) | 226 |
| Internal Dimensions (w*d*h) (mm) | 355*465*1442 |
| External Dimensions (w*d*h) (mm) | 455*623*2031 |
| External Dimensions with Package (w*d*h) (mm) | 490*700*2163 |
| Usable Rack Area (m ²) | 0,138 |
| Net Weight (kg) | 93 |
| Gross Weight (kg) | 101 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,283 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | 0 / +10 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 36 |
| 40" Container Loading Unit | 72 |
| 40" High Container Loading Unit | 72 |
| 13.6 m Truck Loading Unit | 95 |

Optional Specifications *(Mechanic)*

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Two Adjustable Feet
Changing Door Direction
Self Closing Door
Mechanical Thermostat
Horizontal LED Lighting
Metal Inner Body

2031 mm



270 WOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 238 |
| Net Volume (L) | 226 |
| Internal Dimensions (w*d*h) (mm) | 355*465*1442 |
| External Dimensions (w*d*h) (mm) | 455*623*1853,5 |
| External Dimensions with Package (w*d*h) (mm) | 490*700*1985 |
| Usable Rack Area (m ²) | 0,138 |
| Net Weight (kg) | 90 |
| Gross Weight (kg) | 98 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,282 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 36 |
| 40" Container Loading Unit | 72 |
| 40" High Container Loading Unit | 72 |
| 13.6 m Truck Loading Unit | 95 |

Optional Specifications *(Mechanic)*


Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Two Adjustable Feet
Changing Door Direction
Self Closing Door
Mechanical Thermostat
Horizontal LED Lighting
Metal Inner Body



375 C WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 358 |
| Net Volume (L) | 345 |
| Internal Dimensions (w*d*h) (mm) | 516*470*1555 |
| External Dimensions (w*d*h) (mm) | 590*625*2005 |
| External Dimensions with Package (w*d*h) (mm) | 614*662*2140 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 80 |
| Gross Weight (kg) | 88 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,368 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 27 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 76 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Metal Inner Body

2005 mm



375 WOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 358 |
| Net Volume (L) | 345 |
| Internal Dimensions (w*d*h) (mm) | 516*470*1555 |
| External Dimensions (w*d*h) (mm) | 590*628*1827 |
| External Dimensions with Package (w*d*h) (mm) | 605*653*1943 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 70 |
| Gross Weight (kg) | 78 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | 481 |
| Bottle 500 mL Loading Unit | 246 |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 38 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 55 |
| 40" High Container Loading Unit | 55 |
| 13.6 m Truck Loading Unit | 76 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Metal Inner Body



380 C WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 352 |
| Net Volume (L) | 343 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1555 |
| External Dimensions (w*d*h) (mm) | 590*622*2005 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*2138.5 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 100 |
| Gross Weight (kg) | 106 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

- Door Lock
- Price Label
- Night Cover
- Bottle Opener - Bottle Cap Collector
- Block Door
- Inclined Shelf
- Custom Exterior
- Transparent Sticker on Glass
- Raised Canopy
- Stainless Steel Outer Body
- Canopy without Frame - Shutter

Optional Specifications *(Electric)*

- Digital Thermostat
- Remote Control Lock
- Energy Management Control
- Light Switch
- Digital Thermometer
- LED Lighting on Shelf
- IP24 Waterproof

Standard Specifications

- Double Layer Tempered Door Glass
- Two Adjustable Feet
- Changing Door Direction
- Self Closing Door
- Mechanical Thermostat
- Horizontal LED Lighting
- Metal Inner Body

2005 mm



380 WOC WINE



SPECIFICATIONS

| | |
|---|-------------------|
| Gross Volume (L) | 352 |
| Net Volume (L) | 343 |
| Internal Dimensions (w*d*h) (mm) | 490*465*1555 |
| External Dimensions (w*d*h) (mm) | 590*620*1832 |
| External Dimensions with Package (w*d*h) (mm) | 610*640*1972 |
| Usable Rack Area (m ²) | 0,192 |
| Net Weight (kg) | 92 |
| Gross Weight (kg) | 97.5 |
| Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA |
| Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA |
| Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA |
| Product Display Area (m ²) | 0,365 |
| Can (330 mL - Ø 66.3 mm) Loading Unit | NA |
| Bottle 500 mL Loading Unit | NA |
| Number of Shelves | 5 |
| Insulation Thickness (mm) | 50 |
| Working Temperature Range °C | +5 / +12 °C |
| Refrigerant | R600a |
| Climate Class | B/C |
| Supply Voltage | 220-240 / 50 V/Hz |
| 20" Container Loading Unit | 26 |
| 40" Container Loading Unit | 57 |
| 40" High Container Loading Unit | 57 |
| 13.6 m Truck Loading Unit | 80 |

Optional Specifications *(Mechanic)*

Door Lock
Price Label
Night Cover
Bottle Opener - Bottle Cap Collector
Block Door
Inclined Shelf
Custom Exterior
Transparent Sticker on Glass
Raised Canopy
Stainless Steel Outer Body
Canopy without Frame - Shutter

Optional Specifications *(Electric)*

Digital Thermostat
Remote Control Lock
Energy Management Control
Light Switch
Digital Thermometer
LED Lighting on Shelf
IP24 Waterproof

Standard Specifications

Double Layer Tempered Door Glass
Two Adjustable Feet
Changing Door Direction
Self Closing Door
Mechanical Thermostat
Horizontal LED Lighting
Metal Inner Body



WINE COOLERS



170 WOC WINE



230 WOC WINE



180 EWOC WINE



270 C WINE

TECHNICAL SPECIFICATIONS

| | 170 WOC WINE | 230 WOC WINE | 180 EWOC WINE | 270 C WINE | | |
|------------------------------|---|---------------------------|-------------------|-------------------|-------------------|----|
| Dimensions | Gross Volume (L) | 134 | 183 | 195 | 238 | |
| | Net Volume (L) | 125 | 163 | 170 | 226 | |
| Packaging | Internal Dimensions (w*d*h) (mm) | 490*4674*640.5 | 806*399*670.5 | 357*365*1410 | 355*465*1442 | |
| | External Dimensions (w*d*h) (mm) | 592*617*866 | 907*530*868 | 435*516*2008.5 | 455*623*2031 | |
| | External Dimensions with Package (w*d*h) (mm) | 632*643*961.5 | 947*552*900 | 475*550*2143.5 | 490*700*2163 | |
| | Net Weight (kg) | 56 | 77,25 | 70 | 93 | |
| Product Loading | Gross Weight (kg) | 62 | 82,5 | 78 | 101 | |
| | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA | NA | NA | NA | |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA | NA | NA | NA | |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA | NA | NA | NA | |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA | NA | NA | NA | |
| | Product Display Area (m ²) | 0,365 | 0,48 | NA | 0,283 | |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | NA | NA | NA | NA | |
| | Bottle 500 mL Loading Unit | NA | NA | NA | NA | |
| | Technical Specifications | Number of Shelves | 2 | 2 | 5 | 5 |
| | | Insulation Thickness (mm) | 50 | 50 | 40 | 50 |
| Working Temperature Range °C | | +5 / +12 °C | +5 / +12 °C | +5 / +12 °C | 0 / +10 °C | |
| Refrigerant | | R600a | R600a | R600a | R600a | |
| Climate Class | | B/C | B/C | B/C | B/C | |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | |
| | 20" Container Loading Unit | 54 | 48 | 48 | 36 | |
| | 40" Container Loading Unit | 114 | 100 | 100 | 72 | |
| | 40" High Container Loading Unit | 114 | 100 | 100 | 72 | |
| | 13.6 m Truck Loading Unit | 126 | 124 | 120 | 95 | |

WINE COOLERS



TECHNICAL SPECIFICATIONS

270 WOC WINE

375 C WINE

375 WOC WINE

380 C WINE

380 WOC WINE

| | 270 WOC WINE | 375 C WINE | 375 WOC WINE | 380 C WINE | 380 WOC WINE | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 238 | 358 | 358 | 352 | |
| | Net Volume (L) | 226 | 345 | 345 | 343 | |
| | Internal Dimensions (w*d*h) (mm) | 355*465*1442 | 516*470*1555 | 516*470*1555 | 490*465*1555 | 490*465*1555 |
| Packaging | External Dimensions (w*d*h) (mm) | 455*623*1853.5 | 590*625*2005 | 590*628*1827 | 590*622*2005 | 590*620*1832 |
| | External Dimensions with Package (w*d*h) (mm) | 490*700*1985 | 614*662*2140 | 605*653*1943 | 610*640*2138.5 | 610*640*1972 |
| | Net Weight (kg) | 90 | 80 | 70 | 100 | 92 |
| | Gross Weight (kg) | 98 | 88 | 78 | 106 | 97.5 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | NA | NA | 6 | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | NA | NA | 6 | NA | NA |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | NA | NA | 7 | NA | NA |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | NA | NA | 7 | NA | NA |
| | Product Display Area (m ²) | 0,282 | 0,368 | 0,365 | 0,365 | 0,365 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | NA | NA | 481 | NA | NA |
| Technical Specifications | Bottle 500 mL Loading Unit | NA | NA | 246 | NA | NA |
| | Number of Shelves | 5 | 5 | 5 | 5 | 5 |
| | Insulation Thickness (mm) | 50 | 50 | 38 | 50 | 50 |
| | Working Temperature Range °C | +5 / +12 °C | +5 / +12 °C | +5 / +12 °C | +5 / +12 °C | +5 / +12 °C |
| | Refrigerant | R600a | R600a | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 36 | 27 | 26 | 26 | 26 |
| | 40" Container Loading Unit | 72 | 57 | 55 | 57 | 57 |
| | 40" High Container Loading Unit | 72 | 57 | 55 | 57 | 57 |
| | 13.6 m Truck Loading Unit | 95 | 76 | 76 | 80 | 80 |

Modular Coolers




The image features a stylized architectural rendering of a modular refrigeration unit. The top left corner contains the 'green cooler' logo, which consists of a stylized 'G' inside a leaf-like shape. The main part of the image shows a perspective view of the unit's interior, which is divided into several shelves by wire mesh. The unit has a dark frame and a light-colored interior. The background is a mix of dark and light green washes with scattered yellow and white dots, giving it a hand-drawn or artistic feel. The text 'green cooler' is written in a lowercase, sans-serif font next to the logo.


 green cooler

Cooling alternatives in larger areas play always a more critical role. Modular fridges, which can be assembled with each other and easily harmonise with every sort of place to serve fresh and cool products in large supermarkets and activity areas without any compromise on the space width, constitute a very advantageous solution.

360 Modular Coolers

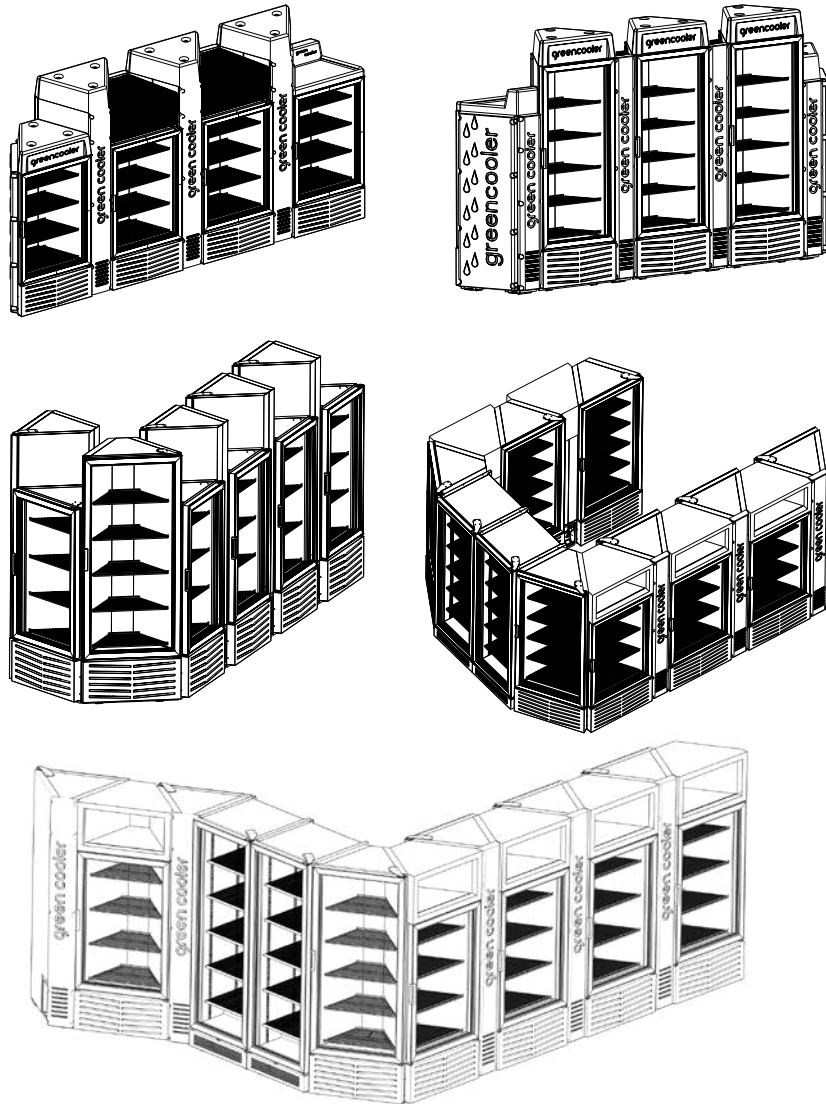

There will be much less m² occupation on the location, where 360 Modular Cooler will be placed, and it is developed to exhibit a wide variety of products, enabling a location-based service enhancement thanks to its different location structures.

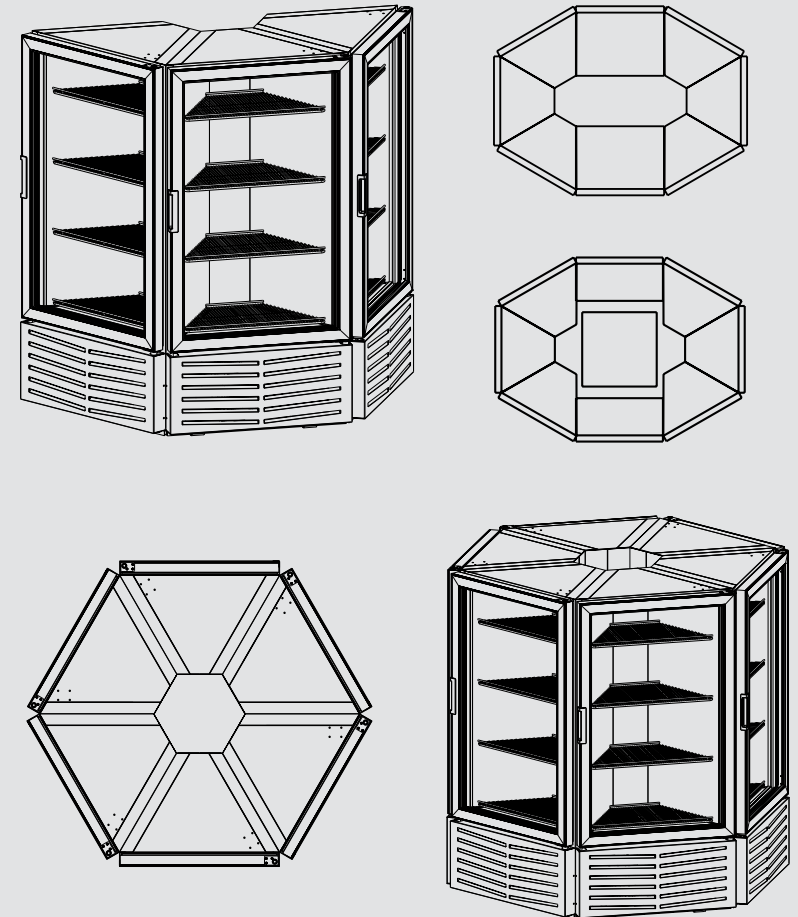

MODULAR COOLERS

TECHNICAL SPECIFICATIONS



360 D



360 DSS



360 DSS-90-SA

| | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 140 | 190 | 260 |
| | Net Volume (L) | 115 | 165 | 200 |
| | Internal Dimensions (w*d*h) (mm) | 583*335*996 | 583*336*1376 | 587*389*1376 |
| | External Dimensions (w*d*h) (mm) | 698*495*1446 | 698*495*1826 | 698*495*1810 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 735*550*1575 | 735*550*1955 | 735*550*2250 |
| | Net Weight (kg) | 75 | 88 | 91 |
| | Gross Weight (kg) | 81 | 93 | 98 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 7 | 7 | 8 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 4 | 4 | 4 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 9 | 9 | 10 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 5 | 5 | 5 |
| | Product Display Area (m²) | 0,21 | 0,21 | 0,218 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 200 | 225 | - |
| | Bottle 500 mL Loading Unit | 100 | 125 | - |
| | Number of Shelves | 3 | 4 | 4 |
| Technical Specifications | Insulation Thickness (mm) | 40 | 40 | 40 |
| | Working Temperature Range °C | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C |
| | Refrigerant | R600a | R600a | R600a |
| | Climate Class | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| Logistics | 20" Container Loading Unit | 32 | 32 | 32 |
| | 40" Container Loading Unit | 64 | 64 | 64 |
| | 40" High Container Loading Unit | 64 | 64 | 64 |
| | 13.6 m Truck Loading Unit | 72 | 72 | 72 |

Pallet Modular Coolers



PALLET MODULAR COOLERS

TECHNICAL SPECIFICATIONS



500 P



1000 P

| | 500 P | 1000 P | |
|--------------------------|---|-------------------|--------------------|
| Dimensions | Gross Volume (L) | 821 | 1140 |
| | Net Volume (L) | 730 | 1045 |
| | Internal Dimensions (w*d*h) (mm) | 900*665*1373 | 900*668*1800 |
| | External Dimensions (w*d*h) (mm) | 1000*830*1770 | 1000*851.5*2195 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 1040*855*1915 | 1015*876.5*2332 |
| | Net Weight (kg) | 132.5 | 208 |
| | Gross Weight (kg) | 138.5 | 222 |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 13 | 13 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 10 | 9 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 15 | 15 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 11 | 10 |
| | Product Display Area (m²) | 0,548 | 0,852 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 1 pallet=1300 | 345+1 pallet (768) |
| | Bottle 500 mL Loading Unit | 1 pallet=650 | 116+1 pallet (432) |
| Technical Specifications | Number of Shelves | 0 | 1 |
| | Insulation Thickness (mm) | 50 | 50 |
| | Working Temperature Range °C | 4 / +12 °C | 4 / +12 °C |
| | Refrigerant | R290a | R290a |
| | Climate Class | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 12 | 12 |
| | 40" Container Loading Unit | 28 | 26 |
| | 40" High Container Loading Unit | 28 | 26 |
| | 13.6 m Truck Loading Unit | 30 | 30 |



It is paramount to supply products in a fresh and cool way in crowded activities. At this stage, employees spend most of their shifts loading products in the coolers. Since fridge doors are open while loading products in them, they consume both more energy and negatively affect the fridge temperature.

Pallet modular coolers allow you to save both time and energy, because their designs are well-suited for a single load of a high number of products, which is a very important advantage in macro sales points, activities and places where there is a significant consumption. This design preventing instantaneous temperature drops makes new products ready to be consumed immediately.



Family Modular Coolers



A
Door Type



FC 295

B
Door Type



FC 420

C
Door Type



FC 660

B
Door Type

B
Door Type



FC 1200

C
Door Type

C
Door Type



FC 1600

A
Door Type

A
Door Type

A
Door Type



FC 1500

A
Door Type



FW 295

B
Door Type



FW 420

C
Door Type



FW 660

B
Door Type

B
Door Type



FW 1200

C
Door Type

C
Door Type



FW 1600


A
Door Type

A
Door Type

A
Door Type



FW 1500

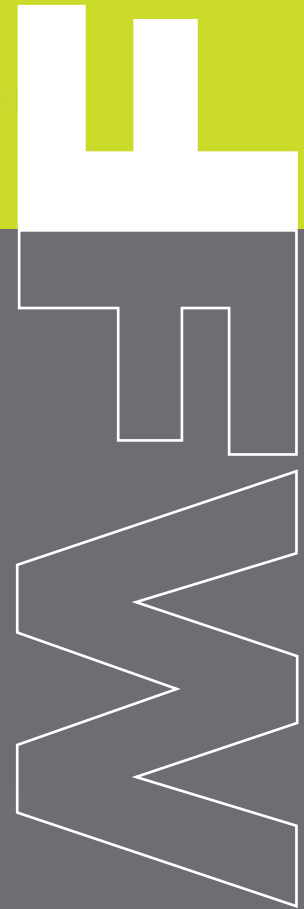

**A**

Door Type

B

Door Type

C

Door Type

| | | | |
|----------------|---|---|---|
| FC 295 | ✓ | × | × |
| FC 420 | × | ✓ | × |
| FC 660 | × | × | ✓ |
| FC 1200 | × | ✓ | × |
| FC 1600 | × | × | ✓ |
| FC 1500 | ✓ | × | × |

A

Door Type

B

Door Type

C

Door Type

| | | | |
|----------------|---|---|---|
| FW 295 | ✓ | × | × |
| FW 420 | × | ✓ | × |
| FC 660 | × | × | ✓ |
| FW 1200 | × | ✓ | × |
| FC 1600 | × | × | ✓ |
| FW 1500 | ✓ | × | × |

FAMILY MODULAR COOLERS

TECHNICAL SPECIFICATIONS



FC 295



FC 1500



FC 420



FC 1200



FC 660



FC 1600

| | | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 316 | 1303 | 357 | 909 | 640 | 1396 |
| | Net Volume (L) | 303 | 1073 | 336 | 885 | 565 | 1239 |
| | Internal Dimensions (w*d*h) (mm) | 424*496*1499 | 1400*551.2*1682 | 489*490*1499 | 1104*420*1695 | 690*553*1702 | 1500*551.2*1682 |
| | External Dimensions (w*d*h) (mm) | 500*640*2147 | 1500*670*2145 | 590*645*2147 | 1204*640*2142 | 790.5*676*2140 | 1600*670*2145 |
| | External Dimensions with Package (w*d*h) (mm) | 535*670*2250 | 1520*701*2281 | 630*655*2270 | 1224*671*2280 | 796*700*2280 | 1620*701*2281 |
| Packaging | Net Weight (kg) | - | - | - | - | 150 | - |
| | Gross Weight (kg) | - | - | - | - | 170 | - |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 | 21 | 7 | 16 | 10 | 22 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 7 | 14 | 8 | 6 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 | 24 | 8 | 18 | 11 | 26 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 8 | 14 | 9 | 7 |
| | Product Display Area (m²) | 0,32 | 1,005 | 0,357 | 0,77 | 0,531 | 1,072 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 360 | 1260 | 498 | 1100 | 400 | 1320 |
| | Bottle 500 mL Loading Unit | 204 | 853 | 245 | 550 | 400 | 967 |
| Technical Specifications | Number of Shelves | 5 | 3*5 | 5 | 5 | 5 | 2*5 |
| | Insulation Thickness (mm) | 38 | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0/10 C° | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0/10 C° |
| | Refrigerant | R600a | R290a | R600a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C | B/C |
| | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| Logistics | 20" Container Loading Unit | 33 | 11 | 26 | 13 | 23 | 11 |
| | 40" Container Loading Unit | 71 | 24 | 57 | 28 | 49 | 24 |
| | 40" High Container Loading Unit | 71 | 24 | 57 | 28 | 49 | 24 |
| | 13.6 m Truck Loading Unit | 80 | 26 | 75 | 40 | 57 | 24 |

FAMILY MODULAR COOLERS

TECHNICAL SPECIFICATIONS



FW 295



FW 1500



FW 420



FW 1200



FW 660



FW 1600

| | | | | | | | |
|--------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Dimensions | Gross Volume (L) | 316 | 1303 | 357 | 909 | 640 | 1396 |
| | Net Volume (L) | 303 | 1073 | 336 | 885 | 565 | 1239 |
| | Internal Dimensions (w*d*h) (mm) | 424*496*1499 | 1400*551.2*1682 | 489*490*1499 | 1104*420*1695 | 690*553*1702 | 1500*551.2*1682 |
| | External Dimensions (w*d*h) (mm) | 500*640*2147 | 1500*670*2145 | 590*645*2147 | 1204*640*2142 | 790.5*676*2140 | 1600*670*2145 |
| Packaging | External Dimensions with Package (w*d*h) (mm) | 535*670*2250 | 1520*701*2281 | 630*655*2270 | 1224*671*2280 | 796*700*2280 | 1620*701*2281 |
| | Net Weight (kg) | - | - | - | - | 150 | - |
| | Gross Weight (kg) | - | - | - | - | 170 | - |
| Product Loading | Number of Products Loaded on the Width (330 mL - Ø 66.3 mm) | 6 | 21 | 7 | 16 | 10 | 22 |
| | Number of Products Loaded on the Depth (330 mL - Ø 66.3 mm) | 6 | 6 | 7 | 14 | 8 | 6 |
| | Number of Products Loaded on the Width (330 mL - Ø 57 mm) | 7 | 24 | 8 | 18 | 11 | 26 |
| | Number of Products Loaded on the Depth (330 mL - Ø 57 mm) | 7 | 7 | 8 | 14 | 9 | 7 |
| | Product Display Area (m²) | 0,32 | 1,005 | 0,357 | 0,77 | 0,531 | 1,072 |
| | Can (330 mL - Ø 66.3 mm) Loading Unit | 360 | 1260 | 498 | 1100 | 400 | 1320 |
| Technical Specifications | Bottle 500 mL Loading Unit | 204 | 853 | 245 | 550 | 400 | 967 |
| | Number of Shelves | 5 | 3*5 | 5 | 5 | 5 | 2*5 |
| | Insulation Thickness (mm) | 38 | 50 | 50 | 50 | 50 | 50 |
| | Working Temperature Range °C | 0 / +10 °C | 0/10 C° | 0 / +10 °C | 0 / +10 °C | 0 / +10 °C | 0/10 C° |
| | Refrigerant | R600a | R290a | R600a | R290a | R290a | R290a |
| | Climate Class | B/C | B/C | B/C | B/C | B/C | B/C |
| Logistics | Supply Voltage | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz | 220-240 / 50 V/Hz |
| | 20" Container Loading Unit | 33 | 11 | 26 | 13 | 23 | 11 |
| | 40" Container Loading Unit | 71 | 24 | 57 | 28 | 49 | 24 |
| | 40" High Container Loading Unit | 71 | 24 | 57 | 28 | 49 | 24 |
| | 13.6 m Truck Loading Unit | 80 | 26 | 75 | 40 | 57 | 24 |



green cooler



Family modular coolers are comprised of six units of product groups. All members of the product group provide visual brand integrity by way of maintaining the same design lines at all points where they are located based on the common intended purpose.



FACTORY

T +90 236 213 1 212 (PBX)

F +90 236 213 1 208

M.O.S.B 4. Kısım Ahmet Nazif Zorlu
Bulvarı No:32 Manisa/TÜRKİYE

ISTANBUL OFFICE

T +90 212 272 15 95

Balmumcu, Barbaros Bulvarı 72/2
34349 Beşiktaş, İstanbul/TÜRKİYE

www.greencooler.com.tr

info@greencooler.com.tr

    [greencooler](#)

